


POINT DE L'ÉVALUATION
ELEVATION 100%
POINT DE L'ÉVALUATION
ELEVATION 100%

⚠ WARNING ⚠
Warning: Do not touch the engine or its parts. The engine is hot and can cause severe burns or death. See the Service Manual for more information.
⚠ AVERTISSEMENT ⚠
Attention: Ne touchez pas le moteur ou ses pièces. Le moteur est chaud et peut causer de graves brûlures ou la mort. Voir le Manuel de Service pour plus d'informations.

⚠ WA ⚠
Hazardous Voltage
Generator with a control will start. Can cause severe damage to equipment. See Service Manual for servicing procedures.

WARNING
Rotating Parts
Do not touch or move
with automatic or remote
start without warning.
Severe injury and
equipment damage.
Manual for proper
procedures.

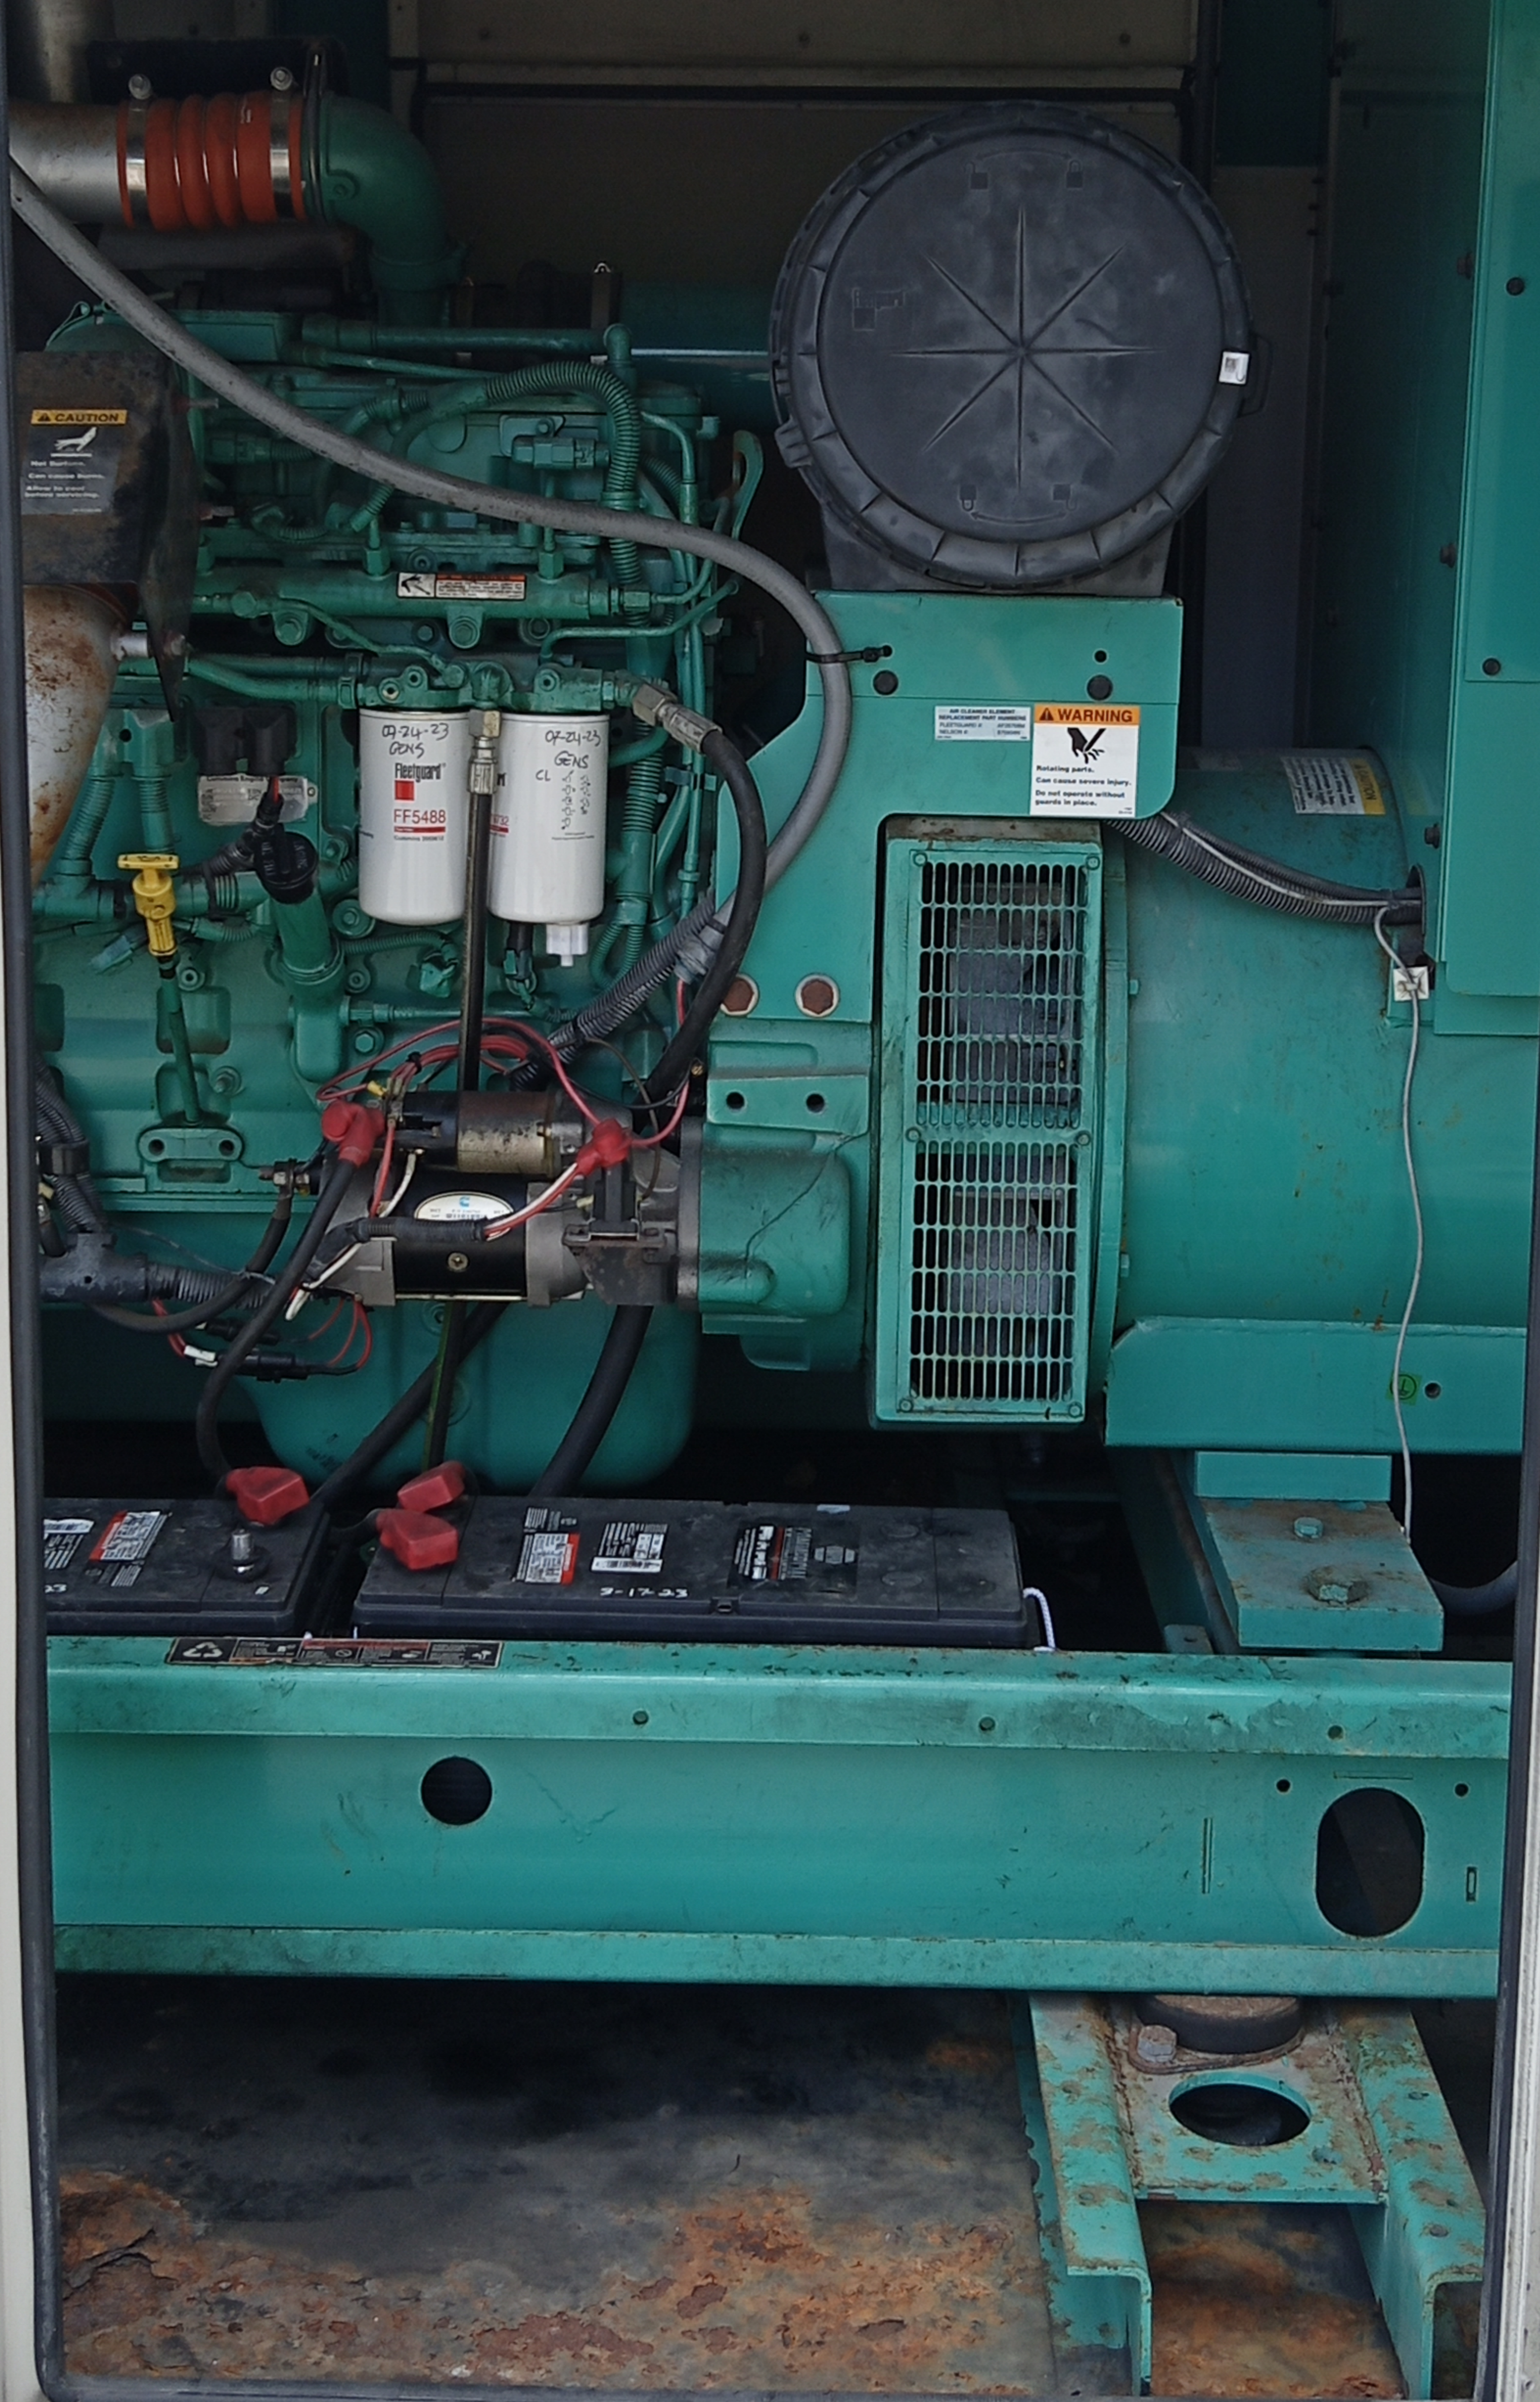

www.cumminspower.com







Power
Generation



10 mm

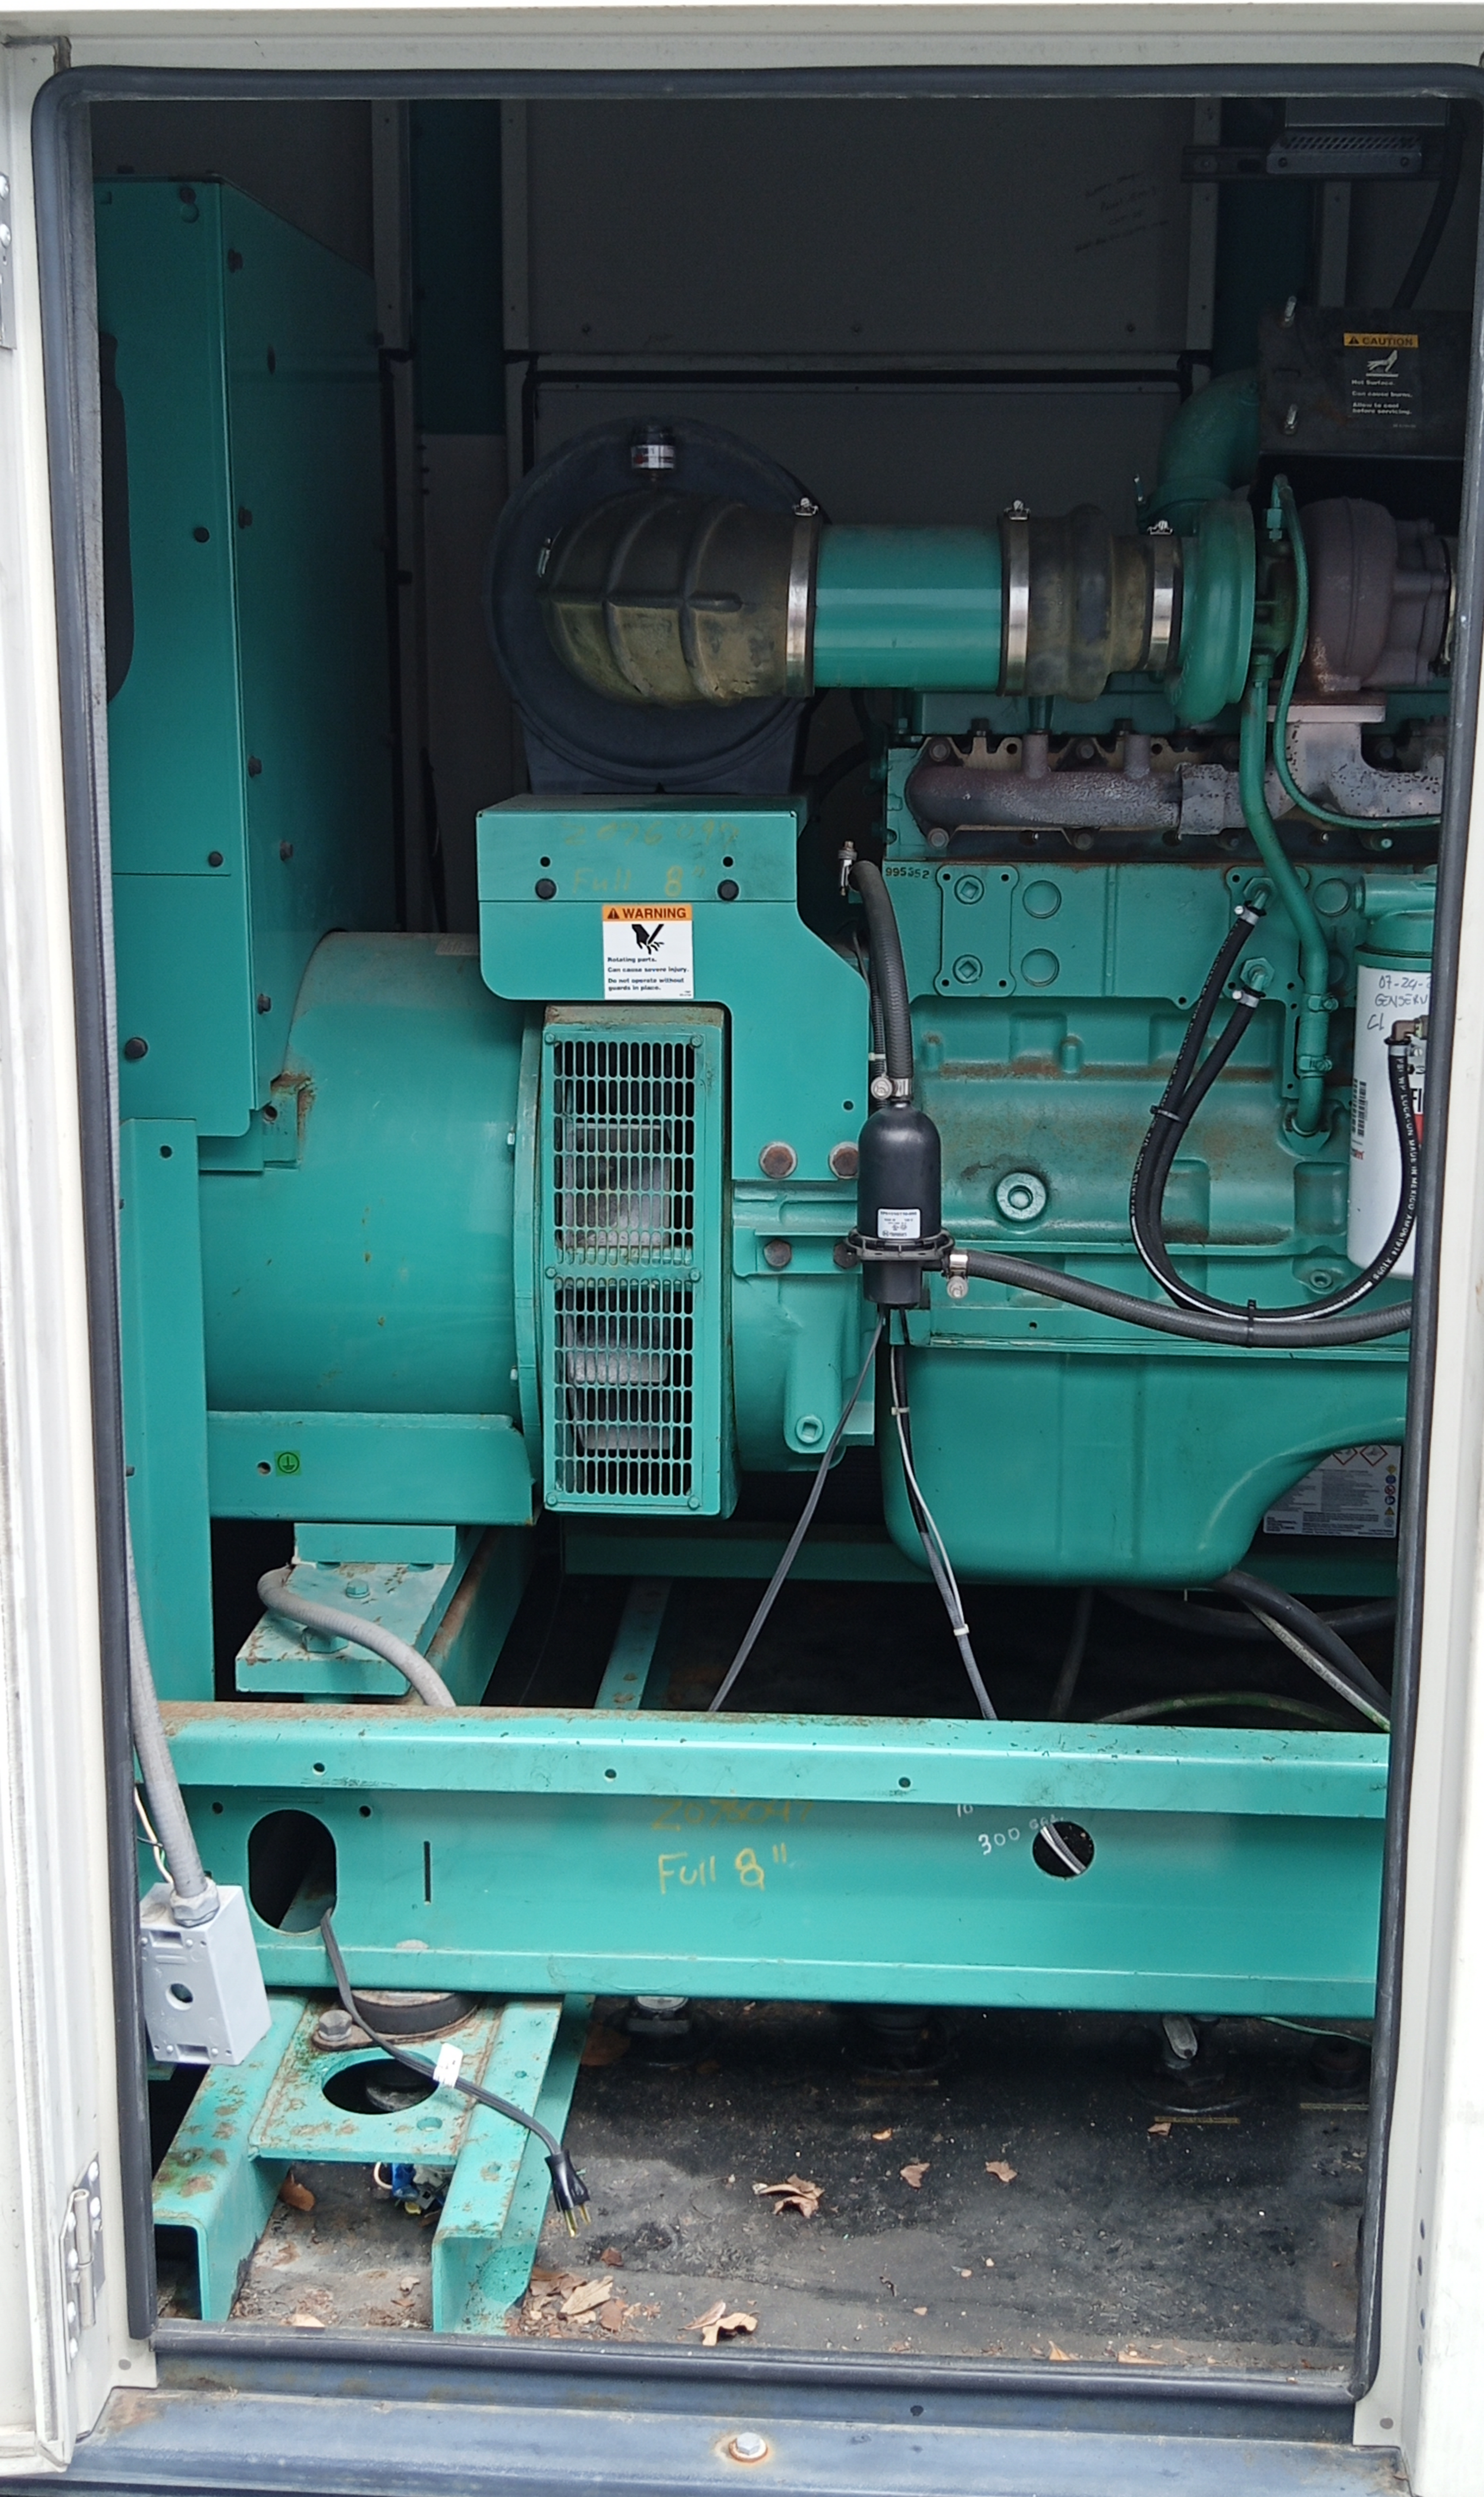



CAUTION

Hot Surfaces
Can cause burns.
Allow to cool
before servicing.

WARNING

Rotating parts.
Can cause severe injury.
Do not operate without
guards in place.

DefendAL
UNIVERSAL
ANTIFREEZE/COOLANT
50/50
CONVENTIONAL FORMULATION FOR USE
IN OLDER MODEL GASOLINE AND
LIGHT DUTY DIESEL VEHICLES.

WARNING

Rotating fan.
Can cause severe injury.
Stay clear of fan when
engine is running.

AVERTISSEMENT

Le ventilateur en rotation.
Peut causer des blessures
graves.
Se tenir à distance du
ventilateur lorsque le
moteur est en marche.

WARNING

Rotating Parts
Can cause severe injury.
Do not operate without
guards in place.

Overfill Alarm

Press to silence alarm

Underwriters Laboratories Inc.

Model 5000
Serial 123456789
Date of Manufacture 12/15/2010
Rated Output 5000 Watts
Rated Voltage 120V AC
Rated Frequency 60 Hz
Rated Power Factor 0.8
Rated Efficiency 85%
Rated Noise Level 75 dBA
Rated Fuel Consumption 1.5 GPH
Rated Oil Consumption 0.5 GPH
Rated Air Consumption 100 CFM
Rated Exhaust Temperature 400°F
Rated Ambient Temperature 100°F
Rated Humidity 95%
Rated Altitude 10,000 ft
Rated Lifetime 10,000 hours
Rated Maintenance Interval 100 hours
Rated Service Interval 100 hours
Rated Warranty 3 years
Rated Country of Origin USA
Rated Manufacturer Cummins Inc.
Rated Distributor ABC Company
Rated Installer XYZ Company
Rated Installer Address 123 Main St
Rated Installer City 12345
Rated Installer State CA
Rated Installer Zip 90001
Rated Installer Phone 123-456-7890
Rated Installer Email info@xyz.com
Rated Installer Website www.xyz.com
Rated Installer License 123456789
Rated Installer Registration 123456789
Rated Installer Expiration 12/31/2015
Rated Installer Address 123 Main St
Rated Installer City 12345
Rated Installer State CA
Rated Installer Zip 90001
Rated Installer Phone 123-456-7890
Rated Installer Email info@xyz.com
Rated Installer Website www.xyz.com
Rated Installer License 123456789
Rated Installer Registration 123456789
Rated Installer Expiration 12/31/2015



BEARWARD
ENGINEERING LTD.

MAIN ROAD, FAR COTTON
NORTHAMPTON, U.K.

TEL +44(0)1604 762851
FAX +44(0)1604 766168
sales@bearward.com

PART NO 5676200101

REF NO 0130-6735

SERIAL NO V16952

MAN. DATE 10/2011 REV 15

(R) Part Number



(S) *R5676200101*
Serial Number



(P) Ref Number



(K) *P0130-6735*
Order Number




(S) *K364619397*
S.O. Number



(G) QTY



G ONE ONLY

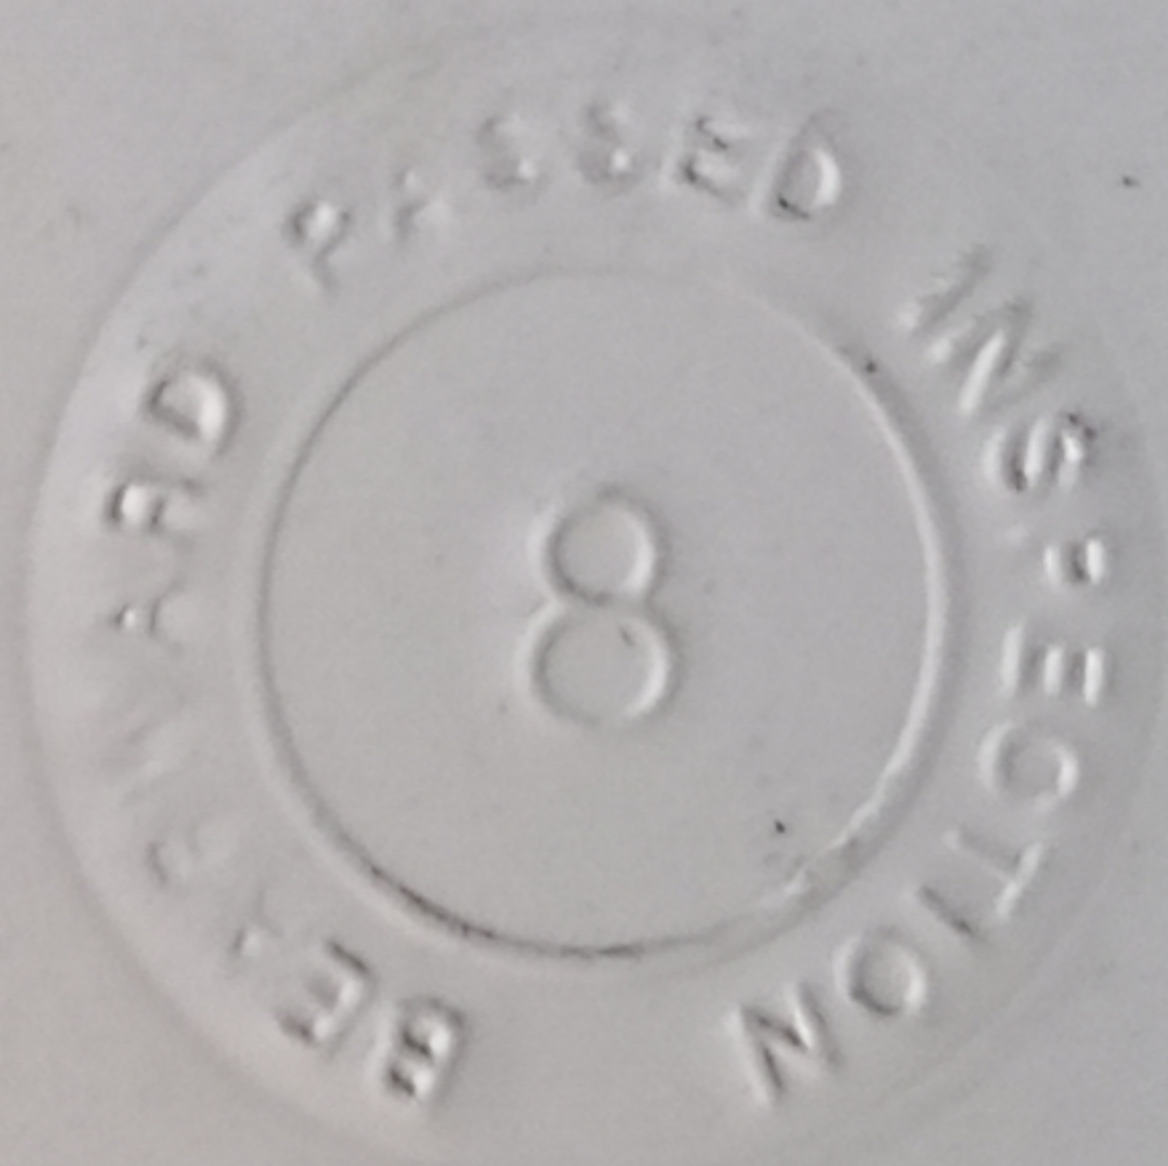

Design Reg./Design Patent	
Europe	0000403423-0001 0000403423-0002
India	203484, 203485
Turkey	2006 00852
China	200630006635.9 200630190659.4
USA	D555561, D562205



**Rotating parts.
Can cause severe injury.
Do not operate without
guards in place.**

*TMI-
98-4798

07-24-23
GENSERVE

A ^{+3/4 TO} B

Fleet

LF3
Combination
Cummir

07-24-23
CL

4070

Consult product selection and usage guide for proper use.
Maintenance practices varies product selection.
Voir l'utilisation correcte dans le guide de sélection et d'entretien.
à choisir varie selon la taille et le mode d'entretien.
Este producto contiene aditivos refrigerantes suplementarios.
consulte la guía para la selección del producto y el uso.
refrigerante y las prácticas de mantenimiento varían la selección

PSI WP LOCK-ON MADE IN MEXICO AM061914

